

CP-Pump Systems Magnetic Drive Pumps



crp

the corrosion expert

CRP is a world leader in the manufacture of PTFE and PFA lined equipment including pipe, fittings, valves, bellows, sight glasses and other ancillary equipment and now also able to supply fully corrosion resistant magnetic drive pumps from CP-Pump Systems in Switzerland.

As the exclusive distributor for CP-Pump Systems in the UK, CRP is individually positioned to deliver a comprehensive, one-stop solution for all your corrosion-resistant piping system needs. Including valves, vessels, pumps, and heat exchangers. We supply everything required to build a fully integrated, piping system from start to finish for your most challenging corrosive applications.

CRP supplies in the chemical, agro-chemical, pharmaceutical, petrochemical, biotechnology, pulp & paper, metals refining, food and beverage manufacturing sectors. CRP is your single source for a complete corrosion-resistant system suitable for the toughest applications.

CRP

Todmorden Road Littleborough
OL15 9EG

United Kingdom

tel: +44 (0)1706 756400

fax: +44 (0)1706 379567


e-mail: enquiry@crp.co.uk

www.crp.co.uk

www.ptfebells.com

Stainless Steel Magnetic Drive Centrifugal Pumps

Efficient – Robust – Safe

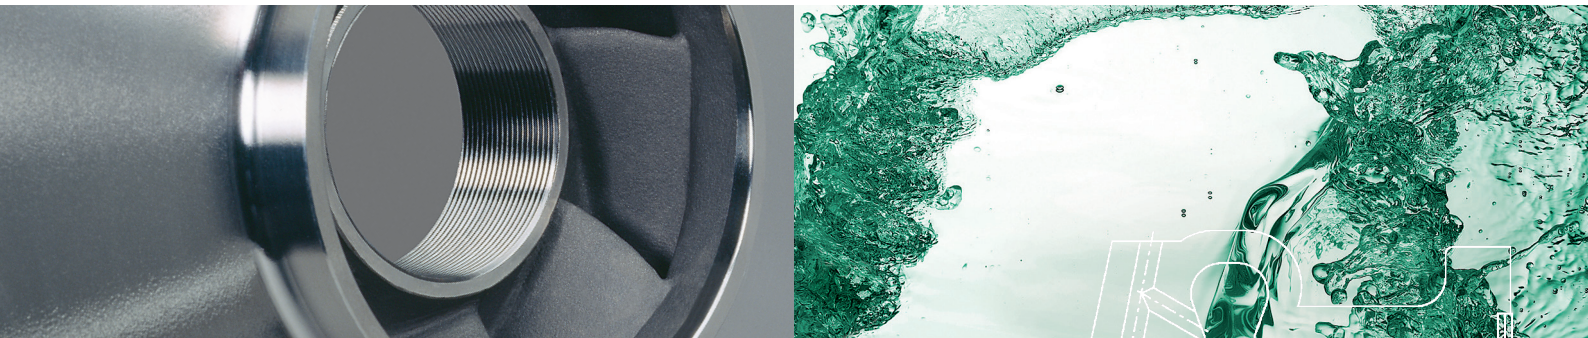

MKP

Magnetic drive chemical process pump

MKP-S

Self-priming magnetic drive chemical process pump


MKTP

Magnetic drive chemical process sump pump

Designed to:
DIN EN ISO 2858, 5199 and 15783
ANSI ASME B73.3

Compliant with:
EC Machinery Directive
EC ATEX Directive
FDA 21 CFR §177

With SI and US range curves

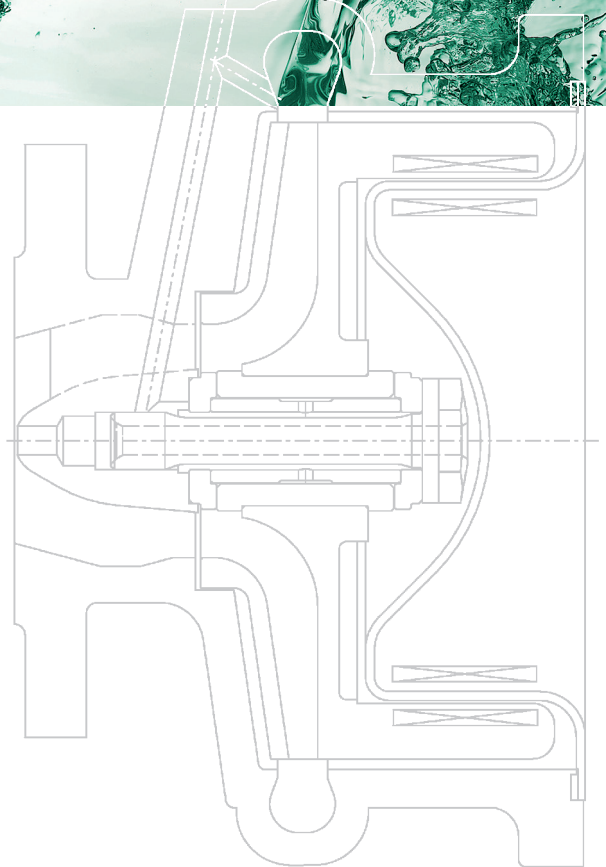



Closed impeller of stainless steel magnetic drive pumps



CP Pump Systems

Stainless Steel Magnetic Drive Centrifugal Pumps

Our company

CP is a highly innovative Swiss company with a rich tradition. Since 1948 we have specialised in developing and manufacturing premium quality high-tech products and providing services for international customers with the most rigorous requirements.

We produce reliable and innovative centrifugal pumps for the chemical, pharmaceutical, petrochemical, biotechnology, food and beverage industries. CP is represented in over 70 countries through its network and offers first-class customer services. This proximity guarantees customers worldwide an efficient local service.

Reflecting our deep commitment to energy efficient products and services, we deliver environmentally friendly solutions that always go hand in hand with maximum safety and economy. As a pioneer in this area, we advise and assist customers with a wide range of needs – throughout the value chain.

CP operates a quality management system certified to ISO 9001.

Stainless steel magnetic drive centrifugal pumps

The MKP, MKP-S and MKTP sealless magnetic drive pumps are ideal to meet the stringent requirements of chemical processing and a multitude of other industries. These highly advanced and extremely energy efficient pumps are built to handle a huge variety of fluids reliably and absolutely safely.

The MKP, MKP-S and MKTP operate according to the unique drive principle by CP with central bearing. With their special design, the pumps require no plain bearing carrier. The pumped fluid provides optimum lubrication and cooling of the single, centrally located impeller bearing assembly, also allowing solids-laden and low-boiling liquids to be pumped. Depending on the pumped medium, they can handle fluids containing solids in concentrations up to 30 per cent with a particle size up to 1 mm.

The pump impeller rotates stable about a stationary axis on the gyroscopic principle, maintaining a perfect hydraulic balance. This minimises bearing loads, increasing the reliability of pump operation.


Added to their compact design with virtually no dead areas, the MKP, MKP-S and MKTP pumps are constructed with just a few, robust components. An intelligent modular system facilitates assembly and keeps the costs of spare parts, maintenance and servicing to a minimum.




MKP with baseplate and motor
horizontal close-coupled (-100 to +250°C)

Conventional Design

Conventional magnetic drive pump design without heating

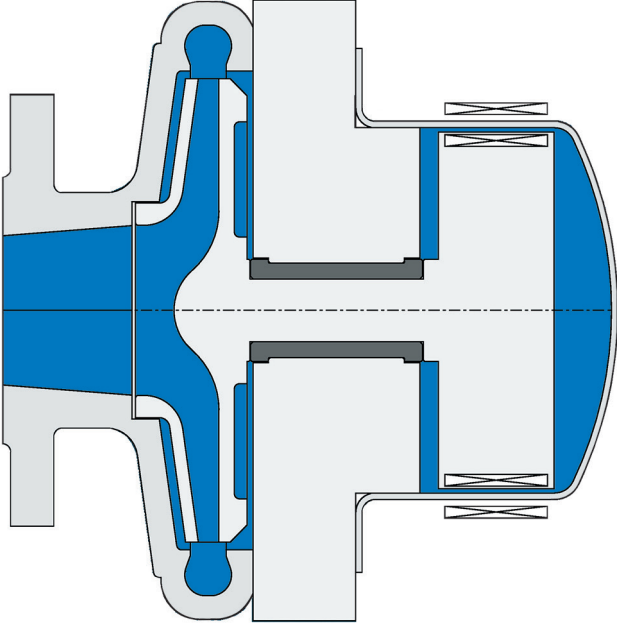


Conventional magnetic drive pump design with heating

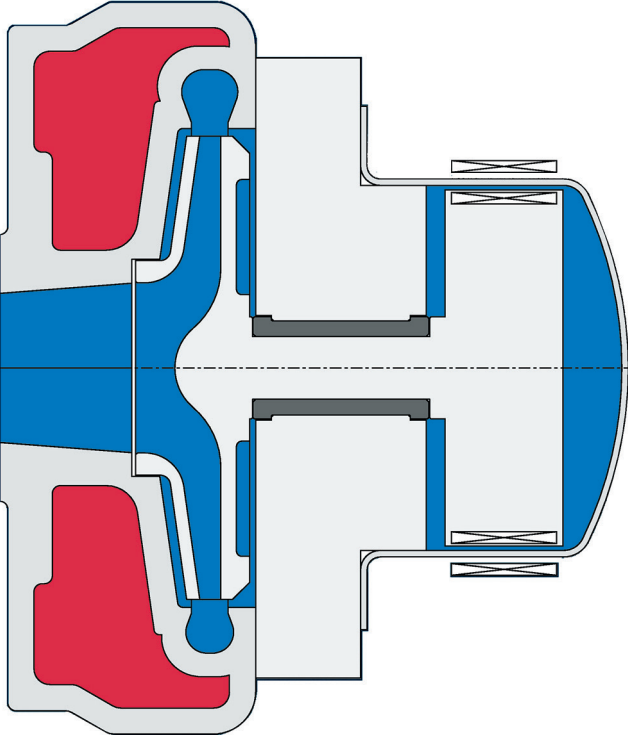



CP's MKP with inverted drive configuration


Unique - Simple - Compact

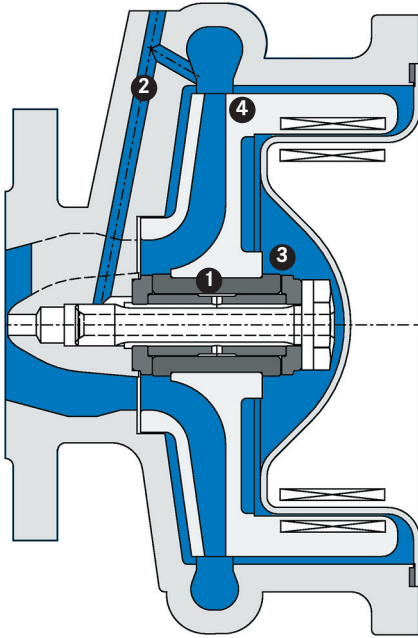

MKP without heating chamber

The MKP's design offers key advantages over conventional pump designs:

- 1 The centrally located bearing assembly, minimal bearing loads and absence of a plain bearing carrier ensure highly reliable operation and allow superior handling of solids-laden and low-boiling fluids.
- 2 A large flush line branching off from the volute provides excellent lubrication and cooling of the bearing assembly with the pumped fluid.
- 3 The compact design with virtually no dead areas means that suspended solids can also be pumped.
- 4 Simple construction and few components make the pump very easy to assemble.

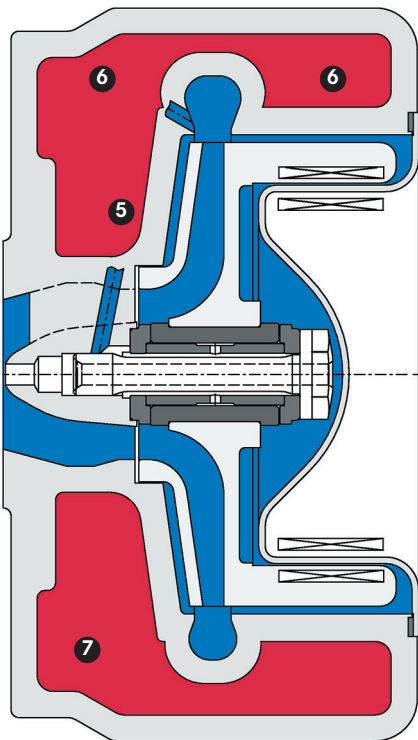

MKP with heating chamber

The MKP's design offers key advantages over conventional pump designs:

- 5 Heating the entire pump with a single heating chamber cuts installation costs.
- 6 Excellent heat distribution in the interior of the pump reduces temperature differences and prevents cold zones.
- 7 High heat transfer efficiency, with the heating energy delivered directly into the fluid chamber, shortens heat-up times.

MKP





Stainless Steel Magnetic Drive Chemical Process Pump

Available in a variety of designs and configurations, the MKP can be customised and tailored perfectly to each specific pumping application. Its connection dimensions and performance data conform to DIN EN ISO 2858, making the MKP easy to retrofit into any installation to replace old pumps.

Technical data	DIN EN ISO
Capacities (min./max.)	0.25 to 1300 m ³ /h
Heads (min./max.)	3 to 230 m
Temperatures (min./max.)	-100 to +350°C
Kinematic viscosities	0.5 to 350 mm ² /s
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives
EC Machinery Directive
EC ATEX Directive
FDA 21 CFR §177

Standards
DIN EN ISO 2858
DIN EN ISO 5 199
DIN EN ISO 15783

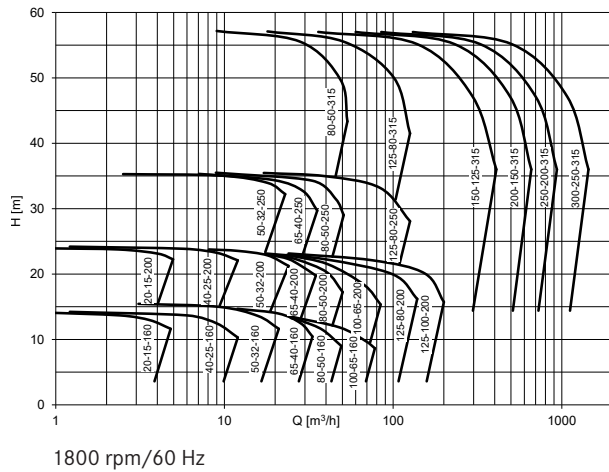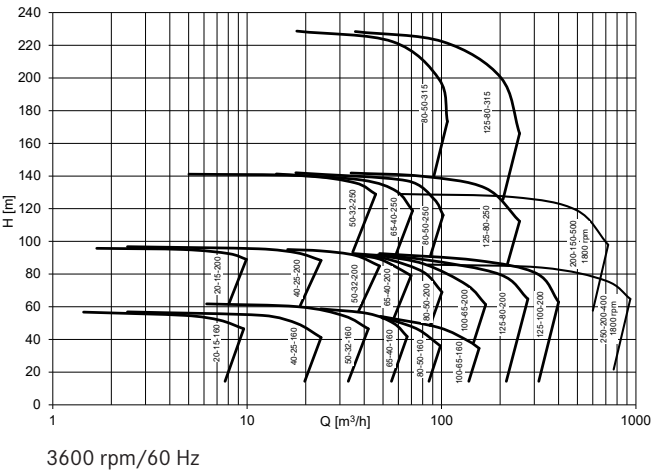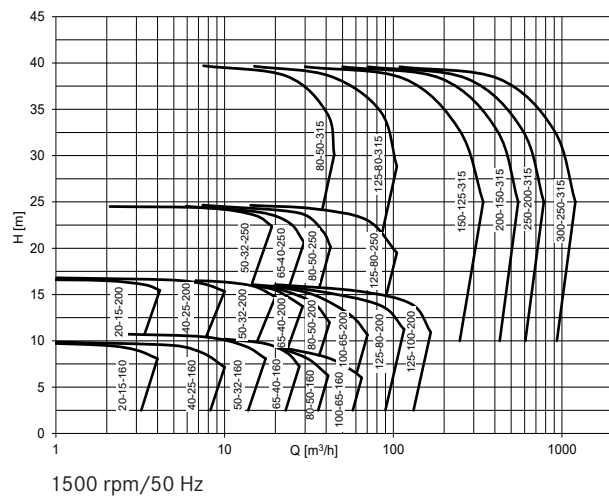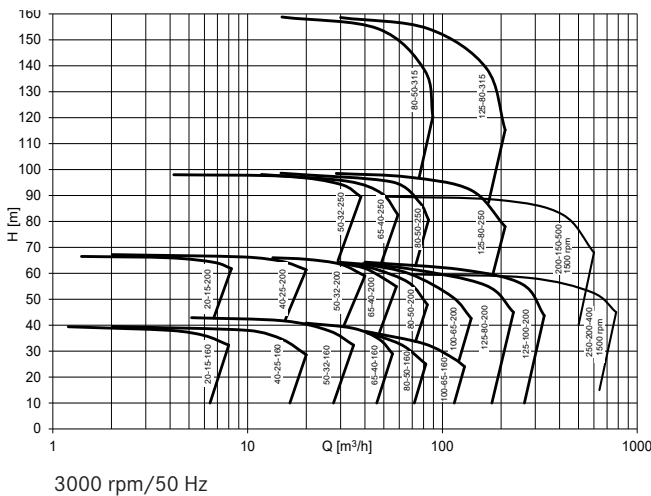

*In general, media with solids content can be transported, but application-specific verification in advance is absolutely necessary.



MKP

Stainless Steel Magnetic Drive Chemical Process Pump

Technical data	DIN EN ISO
Capacities (min./max.)	1 to 5724 gpm
Heads (min./max.)	10 to 755 ft
Temperatures (min./max.)	-148 to +662°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives

EC Machinery Directive

EC ATEX Directive

FDA 21 CFR §177

Standards

DIN EN ISO 2858

DIN EN ISO 5199

DIN EN ISO 15783


Technical data	ANSI (ASME-compliant)
Capacities (min./max.)	1 to 450 gpm
Heads (min./max.)	10 to 310 ft
Temperatures (min./max.)	-148 to +482°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives


FDA 21 CFR §177

Standards


ANSI ASME B73.3

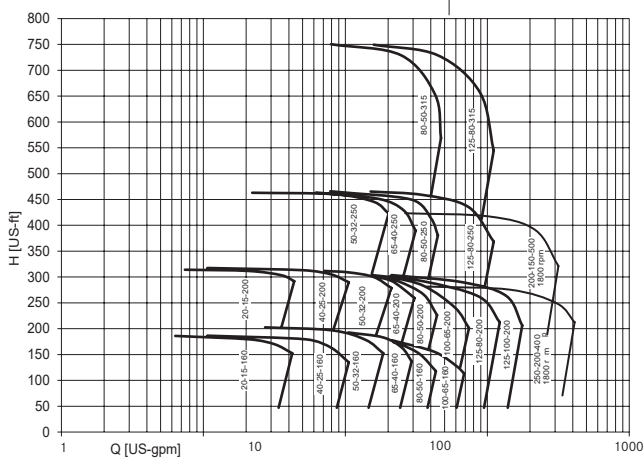


3600 rpm/60 Hz DIN EN ISO

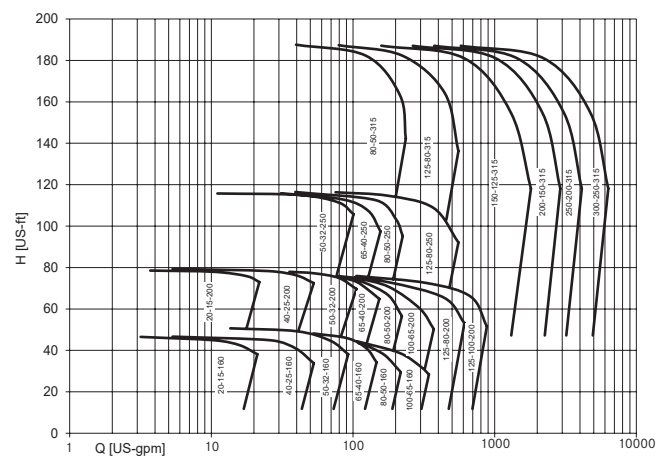

1800 rpm/60 Hz DIN EN ISO

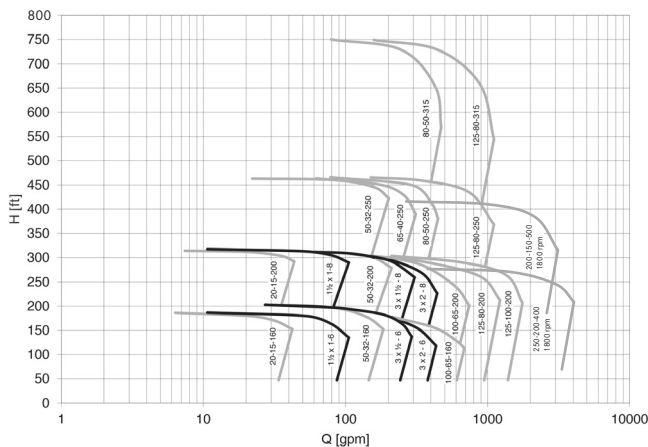


3600 rpm/60 Hz ANSI

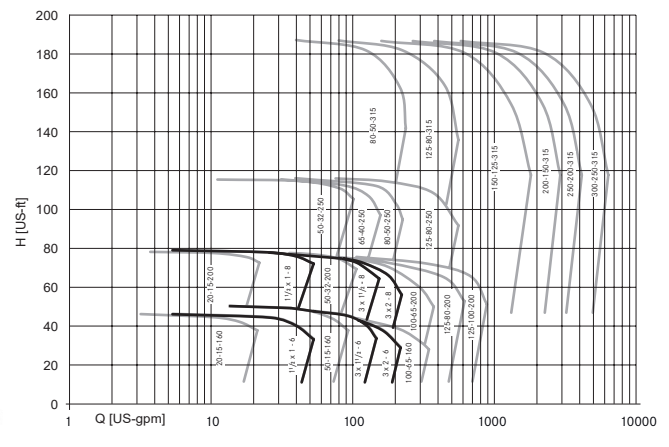


1800 rpm/60 Hz ANSI


*In general, media with solids content can be transported, but application-specific verification in advance is absolutely necessary.




Close-coupled MKP
with baseplate
-100 to +250°C

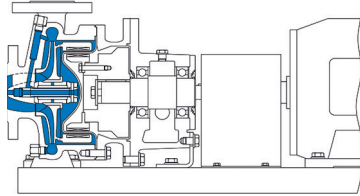


Bearing frame mounted MKP
with baseplate
-100 to +250°C

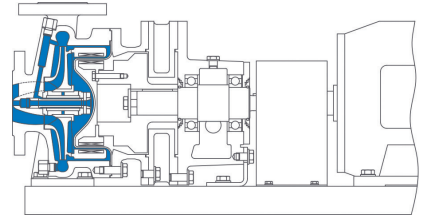


Bearing frame mounted MKP OH2 HT
(high temperature)
with centreline support
-100 to +350°C




Close-coupled MKP with heating chamber
with baseplate
-100 to +250°C

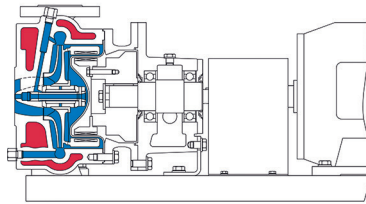


Bearing frame mounted MKP with heating chamber
with baseplate
-100 to +250°C




Close-coupled MKP
with bracket
-100 to +250°C

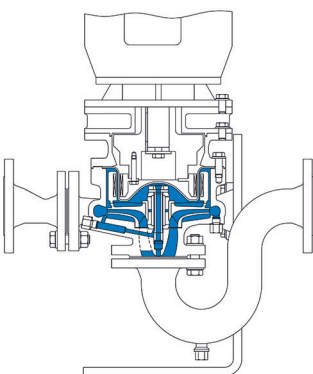

Vertical in-line close-coupled MKP
optional with angle stand
-100 to +250°C

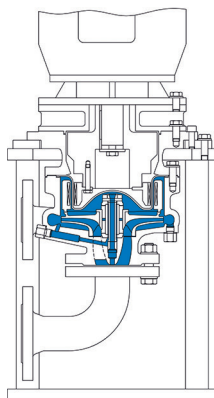

Vertical close-coupled MKP
with stand
-100 to +250°C



Vertical close-coupled MKP
with bracket
-100 to +250°C



MKP-S

Stainless Steel Self-Priming Magnetic Drive Chemical Process Pump

The MKP-S features an integral priming chamber in the casing. A separate priming tank is not necessary because the pump evacuates the suction line itself by creating a vacuum. The MKP-S can even readily pump entrained air in the suction line while running, thus increasing reliability of operation. This pump achieves suction lifts up to 8.5 m.

Technical data

Capacities (min./max.)	1 to 80 m ³ /h
Heads (min./max.)	5 to 60 m
Temperatures (min./max.)	-100 to +250°C
Kinematic viscosities	0.5 to 350 mm ² /s
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives



EC Machinery Directive

EC ATEX Directive



Standards

DIN EN ISO 5199

DIN EN ISO 15783

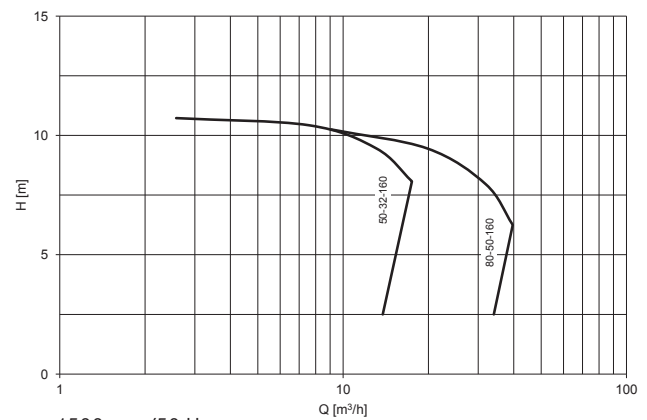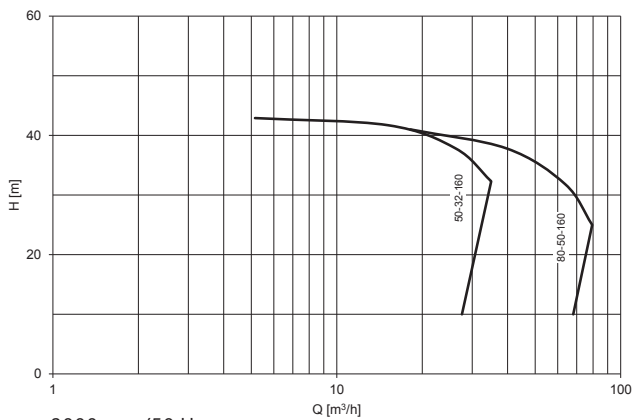

Q [m³/h]

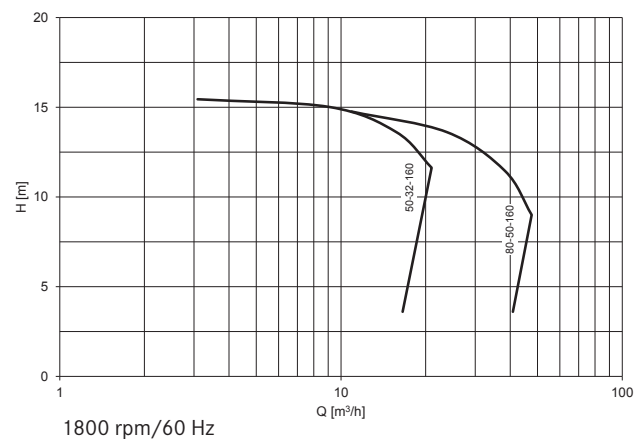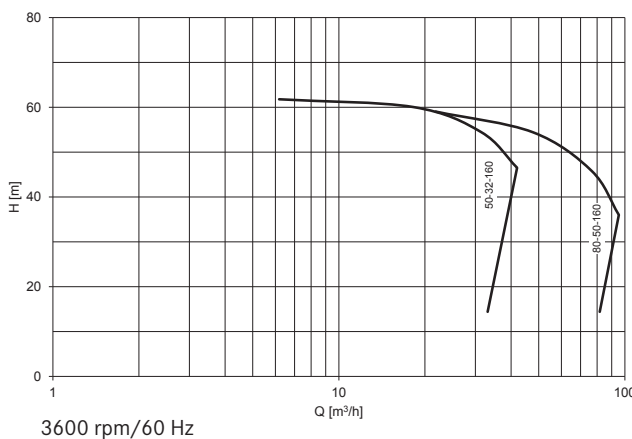

*In general, media with solids content can be transported, but application-specific verification in advance is absolutely necessary.



MKP-S

Stainless Steel Self-Priming Magnetic Drive Chemical Process Pump

The MKP-S features an integral priming chamber in the casing. A separate priming tank is not necessary because the pump evacuates the suction line itself by creating a vacuum. The MKP-S can even readily pump entrained air in the suction line while running, thus increasing reliability of operation. This pump achieves suction lifts up to 3.3 ft.

Technical data

Capacities (min./max.)	2.2 to 325.2 gpm
Heads (min./max.)	16.40 to 196.9 ft
Temperatures (min./max.)	-148 to +482°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives


EC Machinery Directive

EC ATEX Directive


Standards

DIN EN ISO 5199


DIN EN ISO 15783

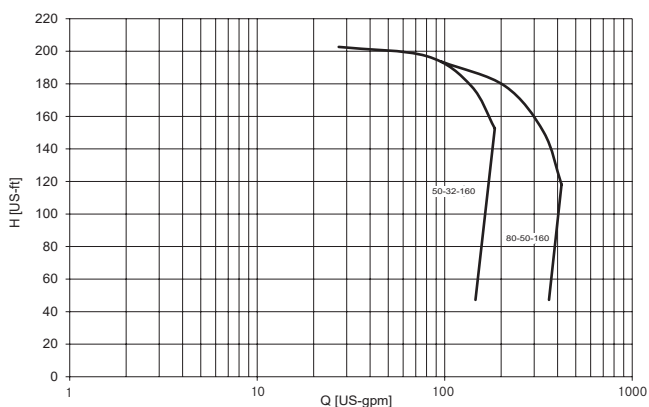


3600 rpm/60 Hz US

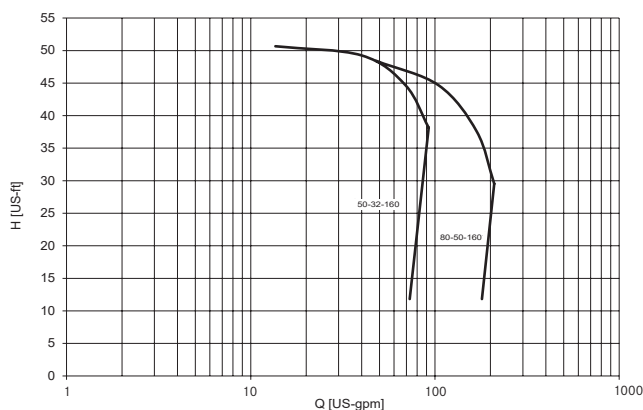

1800 rpm/60 Hz US



Close-coupled MKP-S
with baseplate
-100 to +250°C

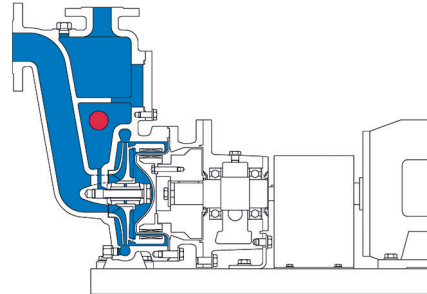

Bearing frame mounted MKP-S with heating
(heating cartridge)
with baseplate
-100 to +250°C



MKP-S with baseplate and motor
horizontal close-coupled (-100 to +250°C)

MKTP

Stainless Steel Magnetic Drive Chemical Process Sump Pump

The MKTP is designed for efficiently emptying tanks that have no bottom drain. It pumps corrosive media absolutely safely, ensuring that no fluid or vapours emitted can escape into the atmosphere. This pump is available with a submersible length up to 4 m and can also be supplied with a double-walled jacketed discharge pipe.

Technical data

Capacities (min./max.)	0.25 to 250 m ³ /h
Heads (min./max.)	3 to 100 m
Temperatures (min./max.)	-20 to +175°C
Kinematic viscosities	0.5 to 350 mm ² /s
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives





EC Machinery Directive

EC ATEX Directive

Standards

DIN EN ISO 5199

DIN EN ISO 15783

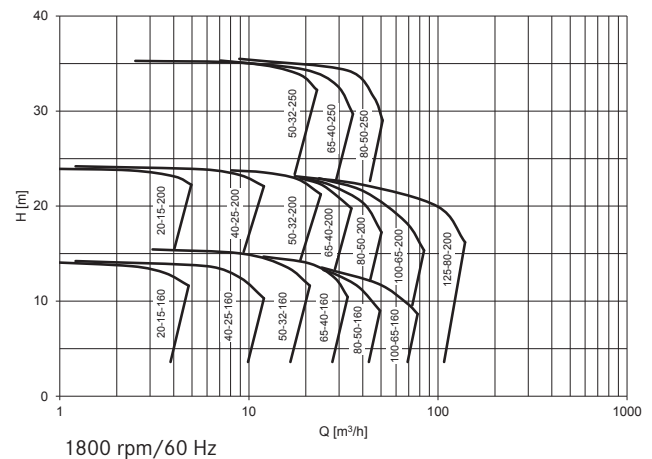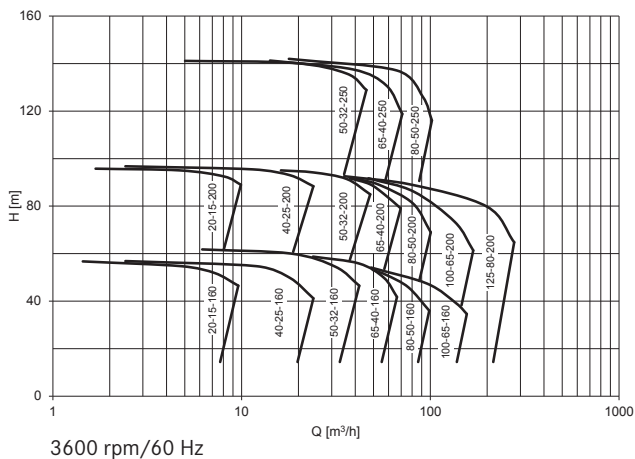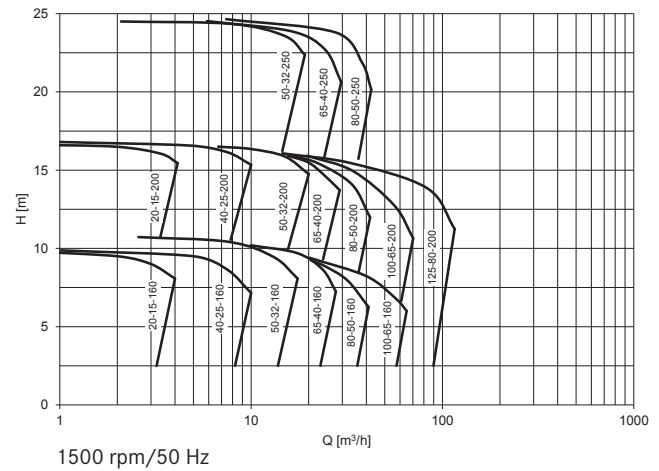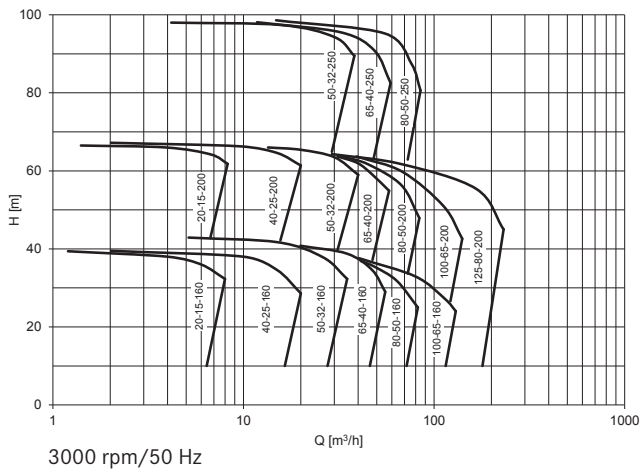



MKTP

Stainless Steel Magnetic Drive Chemical Process Sump Pump

The MKTP is designed for efficiently emptying tanks that have no bottom drain. It pumps corrosive media absolutely safely, ensuring that no fluid or vapours emitted can escape into the atmosphere. This pump is available with a submersible length up to 13.1 ft and can also be supplied with a double-walled jacketed discharge pipe.

Technical data

Capacities (min./max.)	1.1 to 1100.7 gpm
Heads (min./max.)	9.8 to 328.8 ft
Temperatures (min./max.)	-4 to +347°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 30% solids concentration and 1 mm particle size, depending on the pumped fluid*

Directives



EC Machinery Directive

EC ATEX Directive


Standards

DIN EN ISO 5199


DIN EN ISO 15783

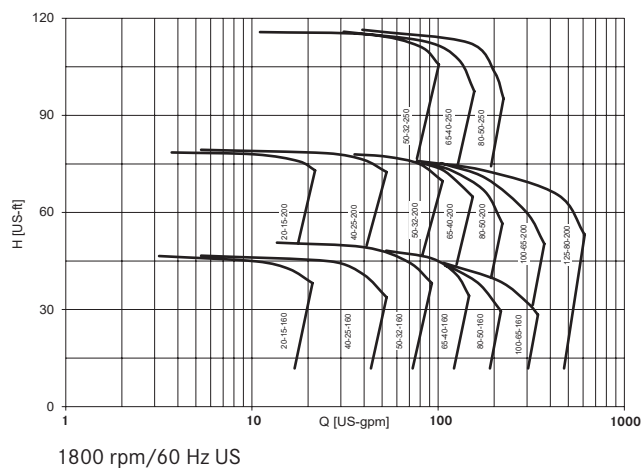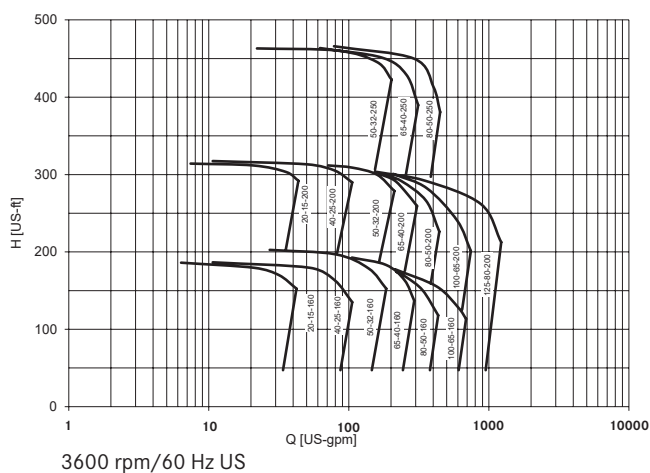

*In general, media with solids content can be transported, but application-specific verification in advance is absolutely necessary.

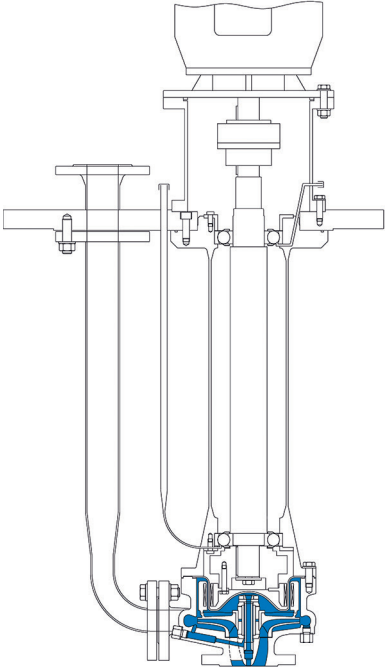

MKTP with regreasable anti-friction bearings
vertical bearing frame mounted
-20 to +175°C

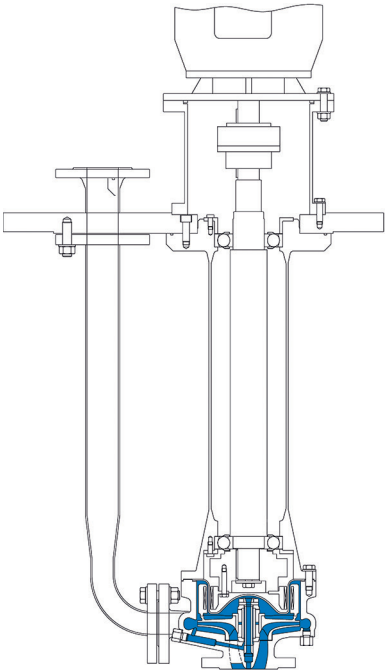

MKTP with greased-for-life anti-friction bearings
vertical bearing frame mounted
-20 to +175°C



MKTP with motor
with jacketed discharge pipe
vertical bearing frame mounted (-20 to +175°C)



Applications

Versatile – Complex – Special

CP's stainless steel magnetic drive pumps are engineered to meet the most stringent quality standards and ensure reliability and utmost safety in production operations. Suitable for many different fluids in a variety of industries and processes, they are capable of handling low, medium and high flow volumes. CP's magnetic drive pumps offer tremendous advantages, especially in pumping very sensitive or hazardous substances.

Energy Efficiency in Industrial Processes

Nowadays, industry is facing increasing demands to improve sustainability and energy efficiency. Pumps are considered to play a key role since two thirds of the energy used in industry is consumed by motor systems. As pumping systems account for around one quarter of this consumption, they offer vast potential to save energy and costs. Already recognising this back in 1999, CP acted accordingly and has become a pioneer in energy-saving pumping equipment.

In recent years, we have continuously enhanced the hydraulic performance of numerous pump systems, increasing their efficiency by up to 30 per cent. At the same time, we have steadily improved pump safety, a mission we have vigorously pursued ever since our company was established in 1948.

We are wholeheartedly committed to promoting sustainable manufacturing in industry around the world: with energy efficient systems and in-depth expertise in all facets and phases of an industrial pumping facility – from planning through production and operation to quality assurance. Our customers benefit from a comprehensive range of bespoke solutions that reduce costs and CO₂ emissions over the long term.

Cleaner pumps, cleaner planet: we firmly believe that sustainable research, thinking and action always pay off for everyone.

Industries

- Chemical processing: basic and fine chemicals (agrochemicals, speciality chemicals)
- Pharmaceuticals
- Petrochemicals
- Biotechnology processing
- Food and beverages

Processes

CP's stainless steel magnetic drive pumps are designed for a wide range of processes, including:

- Aseptic processes
- Chlor-alkali electrolysis
- MDI processes
- Refrigeration and heating cycles
- Tank unloading
- TDI processes

Fluids

CP's stainless steel magnetic drive pumps can handle acids, bases, solvents, heated, crystallising and refrigerated liquids, as well as fluids containing solids. For example:

- Hydrogen peroxide
- Molten sulphur
- Nitric acid
- Oleum
- Phosgene
- Phosphoric acid
- Potassium hydroxide solution
- Sodium hydroxide solution
- Sulphuric acid
- Toluene

Our sales staff will be glad to give you personalised advice tailored to your specific needs, industry, processes and fluids.



Options

Comprehensive – Individual – Combinable

Casing

Materials

- Stainless steel 1.4581 (316)*
- Stainless steel (e.g. 1.4306, Uranus® B6)*
- Duplex alloys (e.g. 1.4517)
- Nickel-base alloys (e.g. Hastelloy® C-4, C-22)*
- Nickel (e.g. 2.4170)
- Titanium (e.g. Grades 2, 7)
- Ceramic coating (Al2O3)

Pressure ratings

- PN 16
- PN 25

With heating chamber

With casing wear ring

Connection flanges

- To EN 1092-1
- Drilled to ANSI/ASME B16.5

Additional connections


- Casing drain (with or without flange)
- External flush connection for bearing lubrication and/or flushing and cooling the magnet assembly
- Lantern monitoring connection
- Flange connection for heating**
- Heating chamber drain (with or without flange)**
- Other casing connections to meet customer needs

Gasket materials

- PTFE
- Pure graphite
- Sigma 511®/NT-CHEM-beige®

Plug seal materials

- PTFE
- Silver-plated nickel



Bearing assembly

Materials

- SiC (sintered silicon carbide)
- SiC with graphite
- SiC with diamond-like coating (ADLC)
- SiC with FuturaSafe® (chemical vapour deposition diamond coating)
- Nickel-bound tungsten carbide
- Nickel-bound tungsten carbide with diamond-like coating (ADLC)



* also available for casing with heating chamber

** available for casing with heating chamber only



Containment shell

With Insulation

With Vortex breaker

Materials

- Stainless steel
- Hastelloy® C
- Titanium (reducing eddy current losses)
- Heavy-duty plastic (eliminating eddy current losses)
- Zirconia ceramic (eliminating eddy current losses)

Coating

- Ceramic (Al₂O₃)



Pump protection

Containment shell temperature monitoring

Pt100 temperature probe

Motor load sensor

Secondary containment



Mounts

Types

- Baseplate
- Bracket
- Stand
- Optional angle stand
- Centreline support
- Stilt support plate
- Horizontal/vertical
- In-line


Materials

- Steel
- Stainless steel

Stilts

Drip pan

Grounding lugs

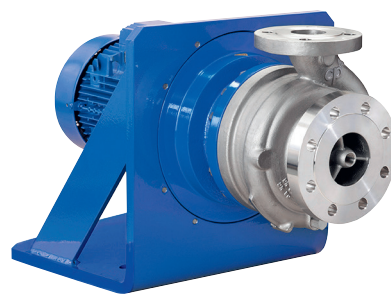

Bearing frame

Lubrication

- Oil lubrication
- Grease lubrication


Oil lubrication options

- Hermetic seal (MagTecta OM™)
- Constant level oiler

Coupling

Coupling guard

- Steel
- Brass

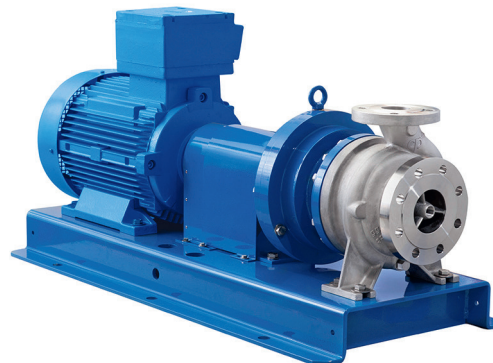


The options vary depending on the pump model.
Our sales team will be glad to advise you in detail.

Sectional Views


MKP without heating chamber

horizontal bearing frame mounted (-100 to +250°C)

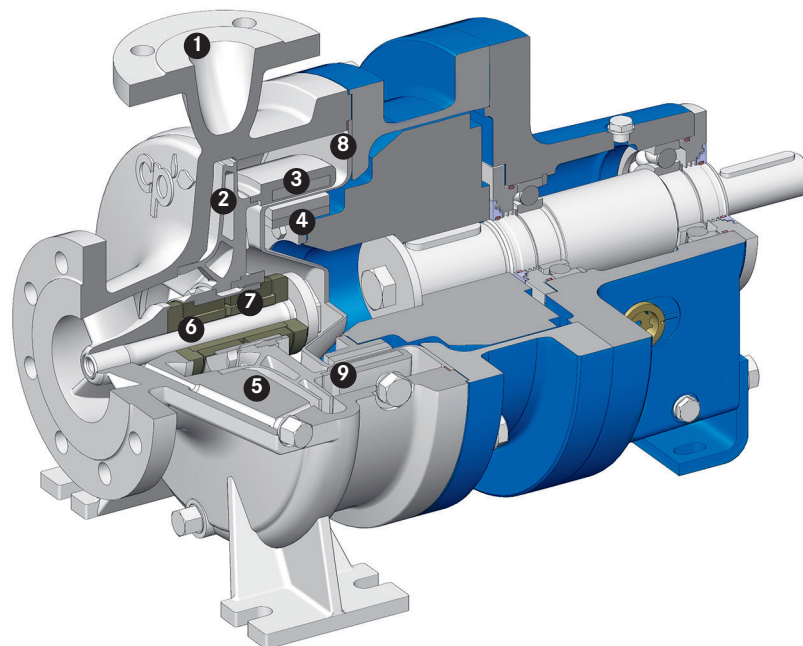

MKP with heating chamber

horizontal close-coupled (-100 to +250°C)

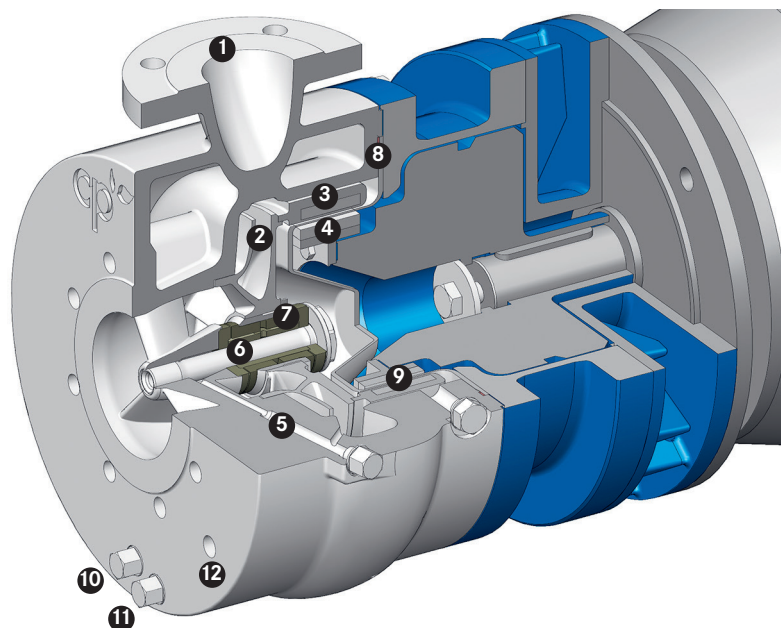

- | | |
|---|---|
| 1 Pump casing | 7 Plain bearing assembly |
| 2 Impeller | 8 Hermetically sealed containment shell |
| 3 Driven magnet assembly (on product side) | 9 Containment shell thermocouple |
| 4 Outside magnetic coupling (on atmospheric side) | 10 Casing drain (pumped fluid) |
| 5 Internal bearing lubrication or external flush connection | 11 Heating chamber drain |
| 6 Single impeller locking sleeve | 12 Cooling or heating fluid connection |



CP Pump Systems

Our Product Portfolio

Customer service

We offer the highest quality, many years of experience and first-class advice from a single source. Our bespoke pump systems meet a wide range of different requirements.

CP's customers benefit from a full service offering: the fastest availability of genuine spare parts, a complete set of technical documentation, competent and efficient customer support, and a dynamic and flexible repair service. All these services ensure that your pumps will operate faultlessly. Thanks to a network in over 70 countries, we advise and serve our customers directly on site.

Energy efficiency consulting

As a trend scout specialised in energy efficiency, CP can deliver a wide spectrum of services relating to pumps and motors: comprehensive advice, in-depth system analysis, meticulous planning and design. Our goal is to actively help our customers optimise the energy consumption of their pumping systems and thereby cut costs over the long term.

Backed by our many years of broad experience, we today advise and assist customers in both the private and public sectors. These include owners and operators of fluid processing plants in the chemical, pharmaceutical and diverse other industries.

Are you interested? Do you have any questions? We would be happy to discuss all the different options with you personally.

Stainless steel magnetic drive centrifugal pumps

MKP

Magnetic drive chemical process pump

MKP-S

Self-priming magnetic drive chemical process pump

MKTP

Magnetic drive chemical process sump pump

MKP-ANSI

Magnetic drive chemical process pump

MKPP

Magnetic drive in-line chemical process peripheral pump

SZMK

Magnetic drive in-line chemical process pump

Mobile centrifugal pump

Mobile magnetic drive chemical process pump

Stainless steel magnetic drive biotech process pump

MKP-Bio

Magnetic drive centrifugal pump for sterile processes

PFA lined magnetic drive centrifugal pumps

MKPL

Magnetic drive chemical process pump

MKPL-S

Self-priming magnetic drive chemical process pump

Solid PTFE magnetic drive centrifugal pumps

MSKP

Magnetic drive chemical process pump

MSKPP

Magnetic drive chemical process peripheral pump

MSKS

Self-priming magnetic drive chemical process side channel pump

Stainless steel mechanical seal centrifugal pumps

ZMP

The 3-In-One mechanical seal chemical process pump: crushing, mixing and pumping

PFA lined double mechanical seal centrifugal pump

EB

Double mechanical seal chemical process pump

Ceramic lined double mechanical seal centrifugal pump

ET

Double mechanical seal chemical process pump



Improving Energy Efficiency in Pumping Systems Helps to Create a Cleaner Planet.

CP Pumpen AG 
Switzerland, Zofingen

CP Pumpen GmbH
Germany, Mannheim

CP Pumpen SAS
France, Strasbourg

CP Pumps Inc.
USA, Birmingham (AL)

Representative Office of CP Pumpen AG
Thailand, Bangkok


Please find your local CP distributor on
www.cp-pumps.com

or contact CP directly:
+41 62 746 85 85 / info@cp-pumps.com.



PFA Lined Magnetic Drive Centrifugal Pumps

Efficient – Non-Corroding – Vacuum-Resistant

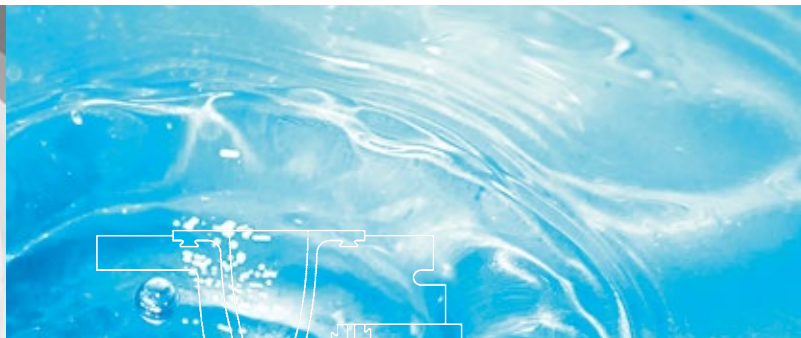

MKPL

Magnetic drive chemical process pump

MKPL-S

Self-priming magnetic drive chemical process pump

Designed to:

DIN EN ISO 2858, 5199 and 15783


Compliant with:

EC Machinery Directive

EC ATEX Directive

FDA 21 CFR §177

With SI and US range curves

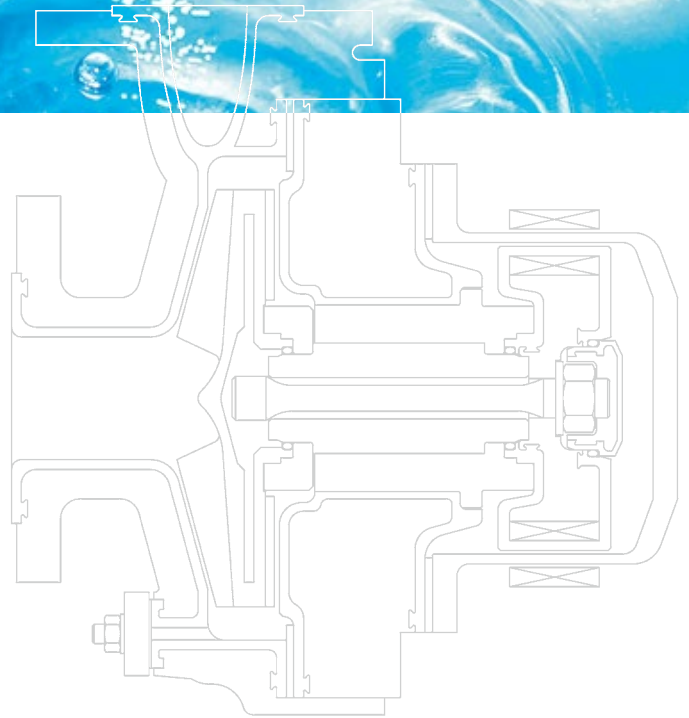



Open impeller of PFA lined magnetic drive pumps



CP Pump Systems

PFA Lined Magnetic Drive Centrifugal Pumps

Our company

CP is a highly innovative Swiss company with a rich tradition. Since 1948 we have specialised in developing and manufacturing premium quality high-tech products and providing services for international customers with the most rigorous requirements.

We produce reliable and innovative centrifugal pumps for the chemical, pharmaceutical, petrochemical, biotechnology, food and beverage industries. CP is represented in over 70 countries through its network and offers first-class customer services. This proximity guarantees customers worldwide an efficient local service.

Reflecting our deep commitment to energy efficient products and services, we deliver environmentally friendly solutions that always go hand in hand with maximum safety and economy. As a pioneer in this area, we advise and assist customers with a wide range of needs – throughout the value chain.

CP operates a quality management system certified to ISO 9001.

Energy efficiency in industry

Nowadays, industry is facing increasing demands to improve sustainability and energy efficiency. Pumps are considered to play a key role because they offer vast potential to save energy and costs. Already recognising this back in 1999, CP took action and has become a pioneer in energy-saving pumping systems.

In recent years, we have continuously enhanced the hydraulic performance of numerous pump systems, increasing their efficiency by up to 30 per cent. At the same time, we have steadily improved pump safety, a mission we have vigorously pursued ever since our company was established in 1948.

We are wholeheartedly committed to promoting sustainable manufacturing in industry around the world. Our customers benefit from a comprehensive range of solutions that reduce costs and CO₂ emissions over the long term. Cleaner pumps, cleaner planet: we firmly believe that sustainable research, thinking and action always pay off for everyone.

PFA lined magnetic drive centrifugal pumps

With their sealless design, the MKPL and MKPL-S magnetic drive pumps are ideal to meet the stringent requirements of chemical processing and a multitude of other industries. These highly advanced and extremely energy efficient pumps are built to handle a huge variety of corrosive fluids reliably and absolutely safely, especially even in high temperature applications.

The pump casing has a thick, heavy-duty, corrosion- and permeation-resistant PFA lining, mechanically locked into the metal armour, ensuring vacuum resistance. This armour absorbs mechanical stresses that can result from system pressure or piping nozzle loads.

Made of pure SSiC (sintered silicon carbide) in a robust design engineered for ceramics, the bearing assembly provides maximum reliability of pump operation. Plain and thrust bearings are secured with polygonal form-fit, self-centring anti-rotation devices.

The MKPL and MKPL-S pumps come with either an open impeller or a closed impeller. The impellers consist of a metallic core for mechanical strength and a thick PFA lining which is firmly connected with the core.

Both pumps are constructed with just a few, robust components using an intelligent modular system that facilitates assembly and minimises the costs of spare parts, maintenance and servicing.

MKPL

PFA Lined Magnetic Drive Chemical Process Pump

Designed for operating at up to +200°C, the MKPL pump is built for safety in handling corrosive fluids in high temperature applications. Its connection dimensions and performance data conform to DIN EN ISO 2858, making the MKPL easy to retrofit into any installation to replace old pumps.





Technical data	
Capacities (min./max.)	0.5 to 350 m ³ /h
Heads (min./max.)	3 to 80 m
Temperatures (min./max.)	-20 to +200°C
Kinematic viscosities	0.5 to 350 mm ² /s
Solids handling	up to 10% solids concentration, depending on the pumped fluid*

Directives

EC Machinery Directive
 EC ATEX Directive
 FDA 21 CFR §177

Standards

DIN EN ISO 2858
 DIN EN ISO 5199
 DIN EN ISO 15783

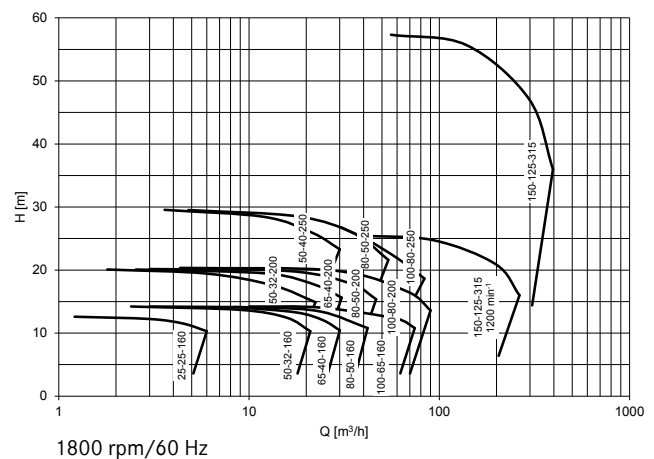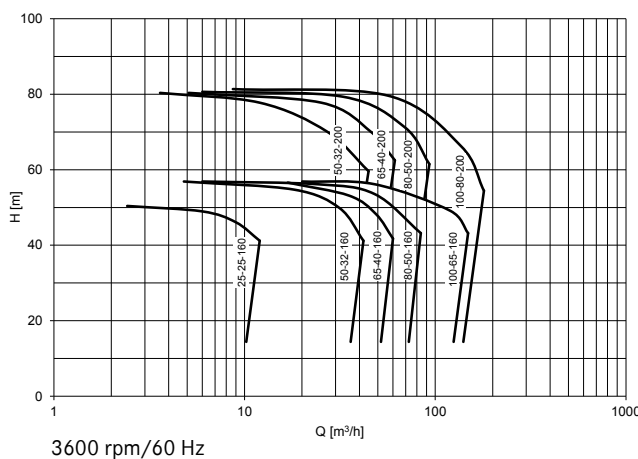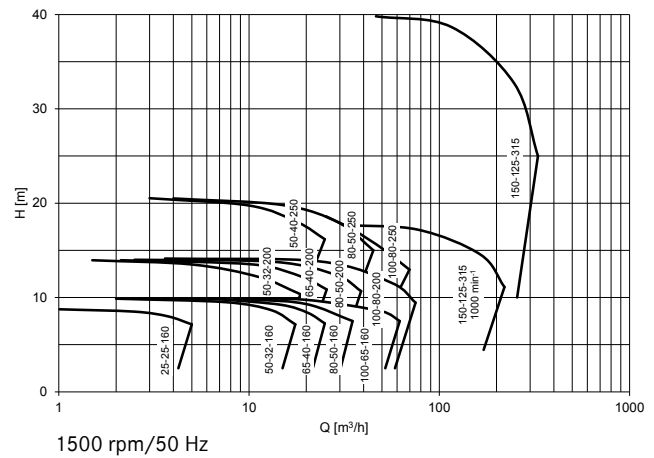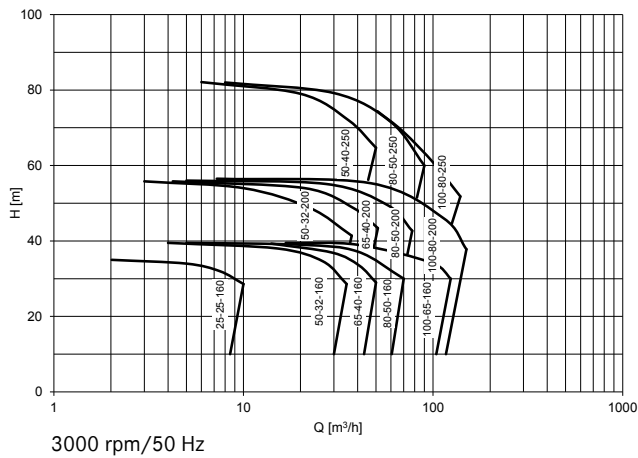



MKPL



PFA Lined Magnetic Drive Chemical Process Pump

Designed for operating at up to +392°F, the MKPL pump is built for safety in handling corrosive fluids in high temperature applications. Its connection dimensions and performance data conform to DIN EN ISO 2858, making the MKPL easy to retrofit into any installation to replace old pumps.


Technical data	
Capacities (min./max.)	2.2 to 1761.2 gpm
Heads (min./max.)	9.8 to 295.2 ft
Temperatures (min./max.)	-4 to +392°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 10% solids concentration, depending on the pumped fluid*

Directives
EC Machinery Directive
EC ATEX Directive
FDA 21 CFR §177


Standards
DIN EN ISO 2858
DIN EN ISO 5199
DIN EN ISO 15783

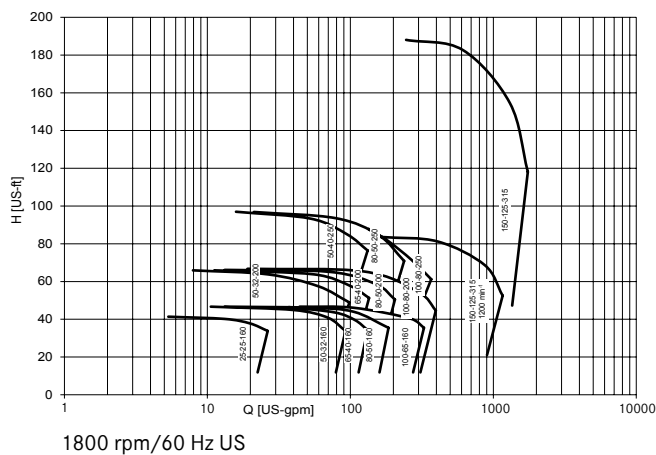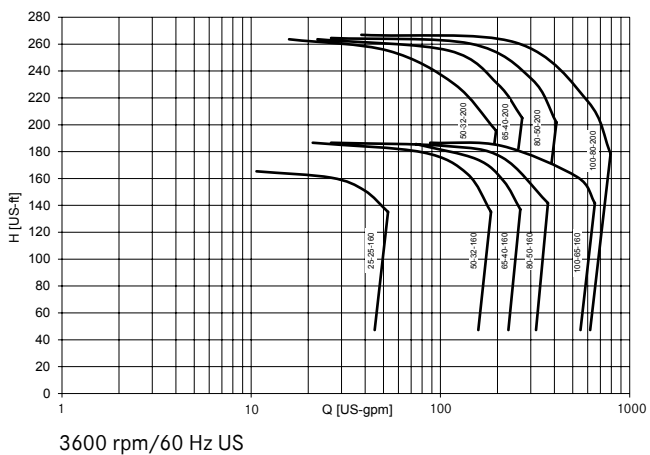

*In general, media with solids content can be transported, but application-specific verification in advance is necessary.



Close-coupled MKPL
with baseplate
-20 to +200°C

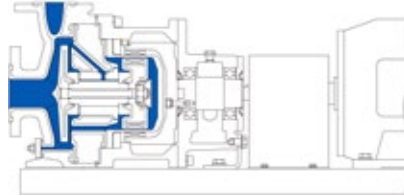

Bearing frame-mounted MKPL
with baseplate
-20 to +200°C



MKPL with baseplate and motor
horizontal close-coupled (-20 to +200°C)



MKPL-S

PFA Lined Self-Priming Magnetic Drive Chemical Process Pump

The MKPL-S features an integral priming chamber in the casing. A separate priming tank is not necessary because the pump evacuates the suction line itself by creating a vacuum. The MKPL-S can even readily pump entrained air in the suction line while running, thus increasing reliability of operation. This pump achieves suction lifts up to 40 m.

Technical data





Capacities (min./max.)	0.5 to 35 m ³ /h
Heads (min./max.)	3 to 40 m
Temperatures (min./max.)	-20 to +150°C
Kinematic viscosities	0.5 to 350 mm ² /s
Solids handling	up to 10% solids concentration, depending on the pumped fluid*

Directives

EC Machinery Directive
EC ATEX Directive

Standards

DIN EN ISO 5199
DIN EN ISO 15783

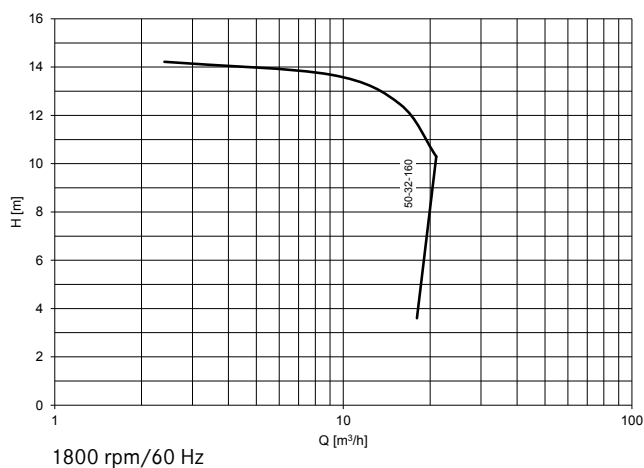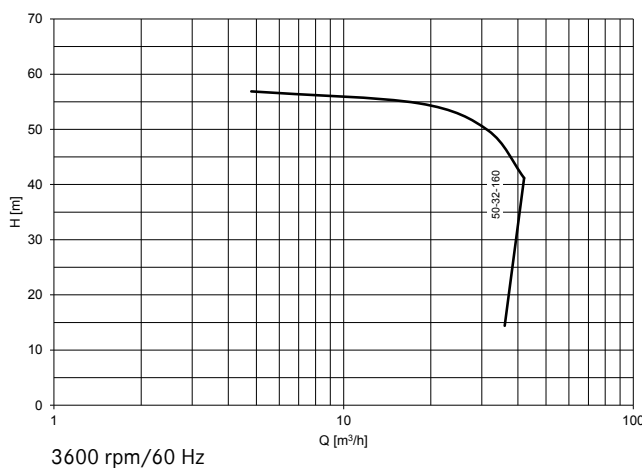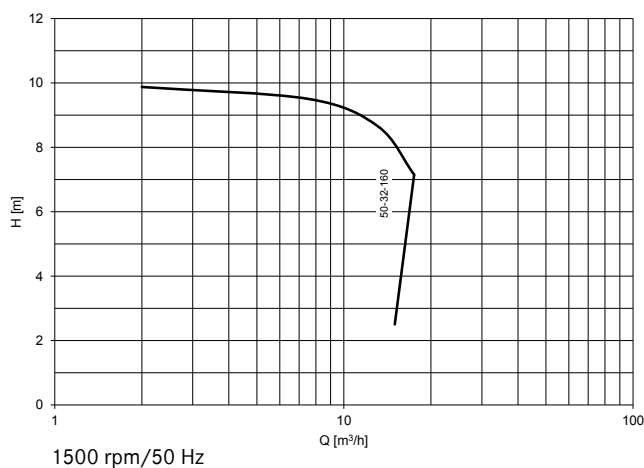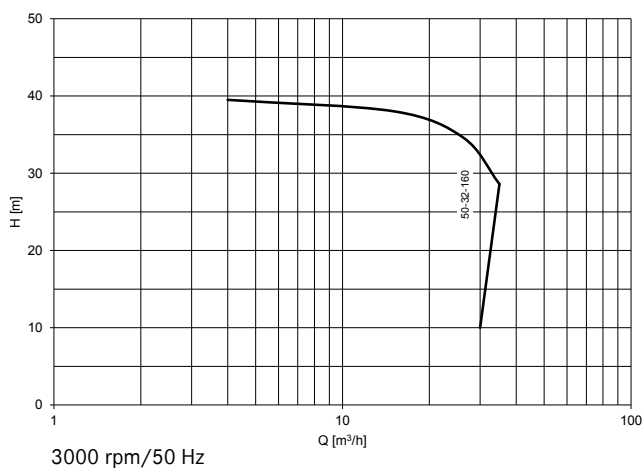

*In general, media with solids content can be transported, but application-specific verification in advance is necessary.



MKPL-S



PFA Lined Self-Priming Magnetic Drive Chemical Process Pump


The MKPL-S features an integral priming chamber in the casing. A separate priming tank is not necessary because the pump evacuates the suction line itself by creating a vacuum. The MKPL-S can even readily pump entrained air in the suction line while running, thus increasing reliability of operation. This pump achieves suction lifts up to 131.2 ft.

Technical data	
Capacities (min./max.)	2.2 to 154.1 gpm
Heads (min./max.)	9.8 to 131.2 ft
Temperatures (min./max.)	-4 to +302°F
Kinematic viscosities	0.5 to 350 cSt
Solids handling	up to 10% solids concentration, depending on the pumped fluid*


Directives
EC Machinery Directive
EC ATEX Directive

Standards
DIN EN ISO 5199
DIN EN ISO 15783

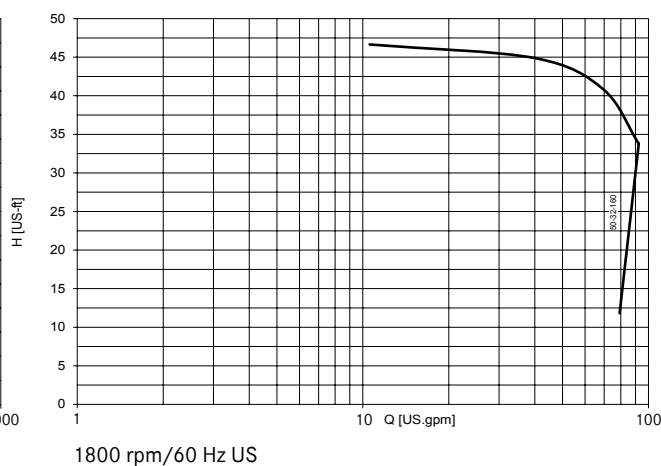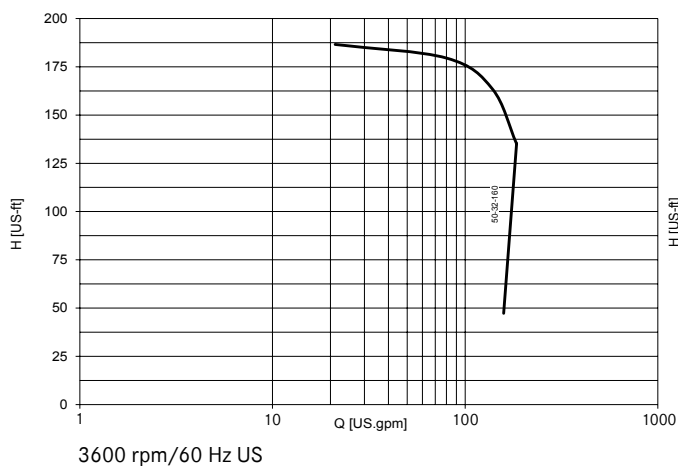


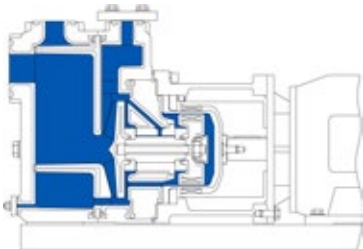

Close-coupled MKPL-S
with baseplate
-20 to +150°C

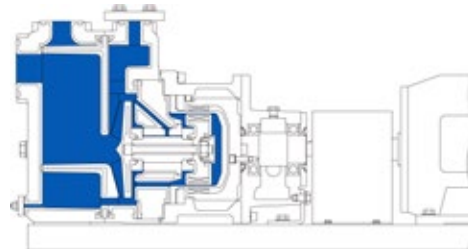

Frame-mounted MKPL-S
with baseplate
-20 to +150°C

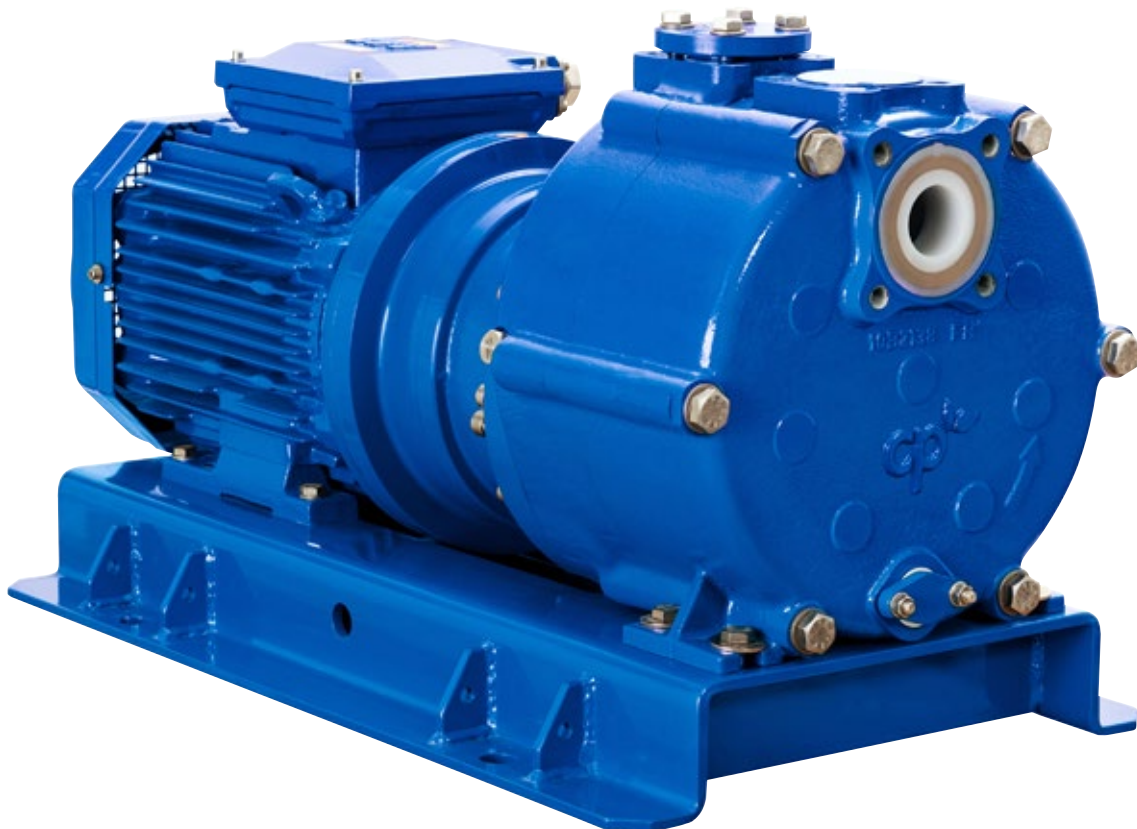

MKPL-S with baseplate and motor
horizontal close-coupled (-20 to +150°C)

Applications

Versatile – Complex – Special

CP's PFA lined magnetic drive pumps are engineered to meet the most stringent quality standards and ensure reliability and utmost safety in production operations. Suitable for many different fluids in a variety of industries and processes, they are capable of handling low, medium and high flow volumes. PFA lined magnetic drive pumps from CP offer tremendous advantages, especially in pumping sensitive or hazardous substances.

Industries

- Chemical processing: basic and fine chemicals (agrochemicals, speciality chemicals)
- Pharmaceuticals
- Biotechnology processing

Processes

CP's PFA lined magnetic drive pumps are designed for a wide range of processes, including:

- Chlor-alkali electrolysis
- Sulphuric acid recycling
- Tank unloading

Fluids

CP's PFA lined magnetic drive pumps can handle hot and/or highly concentrated acids, alkalis (bases), solvents and diffusing fluids.

For example:

- Bromine
- Chlorine
- Nitric acid
- Phosgene
- Potassium hydroxide solution
- Sodium hydroxide solution
- Sulphuric acid

Our sales staff will be glad to give you personalised advice tailored to your specific needs, industry, processes and fluids.





PFA lined metal plain bearing carrier

Options

Comprehensive – Individual – Combinable

Casing

Materials

- Cast iron (GGG 40.3)/vacuum-tight PFA lining

Pressure rating

- PN 16

Connection flanges

- To EN 1092-2
- Drilled to ANSI/ASME B16.5

Additional connections

- Casing drain (with or without flange)
- External flush connection for bearing lubrication and/or flushing and cooling the magnet assembly (for type MKPL)
- Lantern monitoring connection

Gasket materials

- PTFE
- PTFE/graphite

O-ring materials

- FEP/FKM
- Kalrez®/Chemraz®



Bearing assembly

Materials

- SSiC (sintered silicon carbide)
- SSiC with diamond-like coating (ADLC)
- SSiC with FuturaSafe®



Containment shell

With containment shell monitoring

Materials

- Carbon fibre reinforced PTFE
- Heat-resistant carbon fibre reinforced PTFE
- Carbon fibre reinforced PVDF





Pump protection

Containment shell leakage monitoring

Pt100 temperature probe

Engine load sensor



Mounts

Type

- Baseplate
- Horizontal

Materials

- Steel
- Stainless steel

Stilts

Drip pan

Grounding lugs



Bearing frame

Lubrication

- Oil lubrication
- Grease lubrication

Oil lubrication options

- Hermetic seal (MagTecta OM™)
- Constant level oiler

Coupling

Coupling guard

- Steel
- Brass




The options vary depending on the pump model. Our sales staff will be glad to advise you in detail.

Sectional View

MKPL

Bearing frame (-20 to +200°C), horizontal

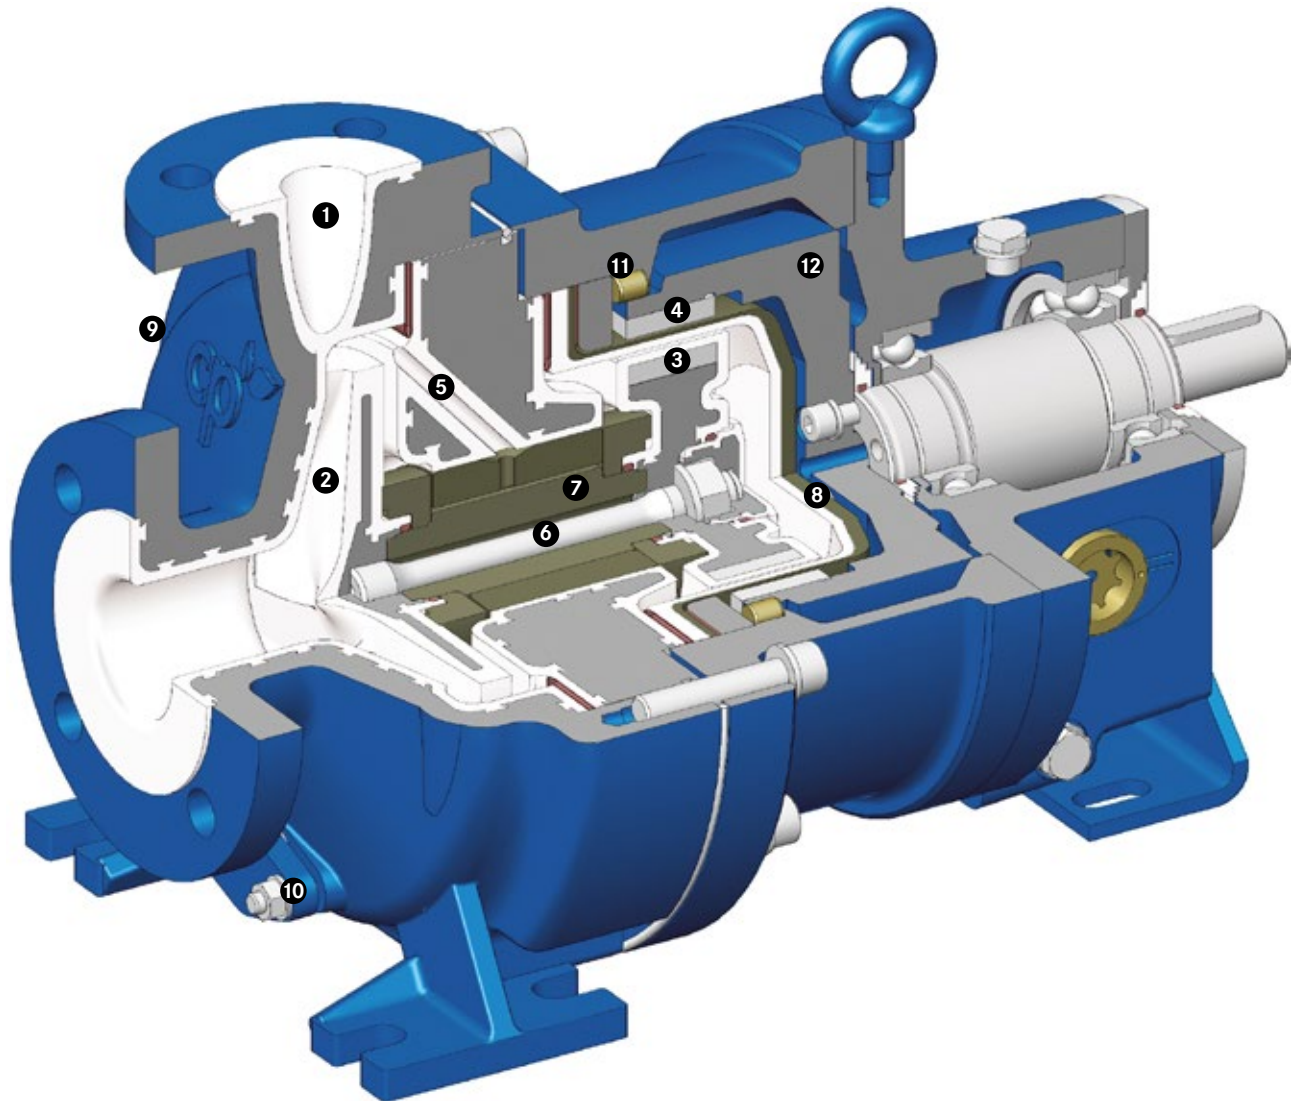

- | | |
|--|---|
| 1 Pump casing with PFA lining | 8 One-piece, vacuum-resistant, non-metallic containment shell |
| 2 Impeller | 9 Pt100 temperature probe on casing |
| 3 Inner magnet assembly (on product side) | 10 Casing drain |
| 4 Outer magnet assembly (on atmospheric side) | 11 Bump pin |
| 5 Internal bearing lubrication or external flush connection | 12 Flywheel |
| 6 Single bolt with waisted shank to fasten the rotating unit | |
| 7 Plain bearing assembly | |



CP Pump Systems

Our Product Portfolio

Customer service

We offer the highest quality, many years of experience and first-class advice from a single source. Our bespoke pump systems meet a wide range of different requirements.

CP's customers benefit from a full service offering: the fastest availability of genuine spare parts, a complete set of technical documentation, competent and efficient customer support, and a dynamic and flexible repair service. All these services ensure that your pumps will operate faultlessly. Thanks to a network in over 70 countries, we advise and serve our customers directly on site.

Energy efficiency consulting

As a trend scout specialised in energy efficiency, CP can deliver a wide spectrum of services relating to pumps and motors: comprehensive advice, in-depth system analysis, meticulous planning and design. Our goal is to actively help our customers optimise the energy consumption of their pumping systems and thereby cut costs over the long term.

Backed by our many years of broad experience, we today advise and assist customers in both the private and public sectors. These include owners and operators of fluid processing plants in the chemical, pharmaceutical and diverse other industries.

Are you interested? Do you have any questions? We would be happy to discuss all the different options with you personally.

Stainless steel magnetic drive centrifugal pumps

MKP

Magnetic drive chemical process pump

MKP-S

Self-priming magnetic drive chemical process pump

MKTP

Magnetic drive chemical process sump pump

MKP-ANSI

Magnetic drive chemical process pump

MKPP

Magnetic drive in-line chemical process peripheral pump

SZMK

Magnetic drive in-line chemical process pump

Mobile centrifugal pump

Mobile magnetic drive chemical process pump

Stainless steel magnetic drive biotech process pump

MKP-Bio

Magnetic drive centrifugal pump for sterile processes

PFA lined magnetic drive centrifugal pumps

MKPL

Magnetic drive chemical process pump

MKPL-S

Self-priming magnetic drive chemical process pump

Solid PTFE magnetic drive centrifugal pumps

MSKP

Magnetic drive chemical process pump

MSKPP

Magnetic drive chemical process peripheral pump

MSKS

Self-priming magnetic drive chemical process side channel pump

Stainless steel mechanical seal centrifugal pumps

ZMP

The 3-In-One mechanical seal chemical process pump: crushing, mixing and pumping

PFA lined double mechanical seal centrifugal pump

EB

Double mechanical seal chemical process pump


Ceramic lined double mechanical seal centrifugal pump

ET

Double mechanical seal chemical process pump



Improving energy efficiency in pumping systems helps to create a cleaner planet.

CP Pumpen AG 
Switzerland, Zofingen

CP Pumpen GmbH
Germany, Mannheim

CP Pumpen SAS
France, Strasbourg

CP Pumps Inc.
USA, Birmingham (AL)

Representative Office of CP Pumpen AG
Thailand, Bangkok

Please find your local CP distributor on
www.cp-pumps.com

or contact CP directly:
+41627468585 / info@cp-pumps.com.

